BI1215SOD

15” Outdoor Crescent Ice Maker • Outdoor Series

STAINLESS
SOLID (LOCK)

FEATURES & BENEFITS

PERFORMANCE	• Uses less than 3 gallons of water to produce up to 25 lbs of ice per day • Up to 25 lbs in ice storage capacity • Daily ice production rate is approx. 4 times greater than the average household refrigerator • Crescent ice cube dimensions: ½” W x ¾” H x ½” L • On/Off switch is conveniently located on lower face of unit
INTERIOR/EXTERIOR	• No drain required • Standard professional stainless steel handle is interchangeable with commercial handle accessory • Full stainless steel cabinet and door are deemed suitable for outdoor use by UL • Door swing is field reversible
INTEGRATION	• Unit is designed to be built-in or can be freestanding • Four independently adjustable leveling legs provide a precise undercounter fit

MODEL DETAILS

Model	Voltage	Door Swing	Finish	Shipping Weight
U-BI1215SOD-00A	115	Field Reversible	Stainless Solid (Lock)	89 lbs

ACCESSORIES

Model	Description	Finish	Shipping Weight
23050	Commercial Door Handle, ⅞” Diameter	Stainless	2 lbs

BI1215SOD

Outdoor Series • 15” Outdoor Crescent Ice Maker

DIMENSIONS

Dimensions shown apply to all finishes.

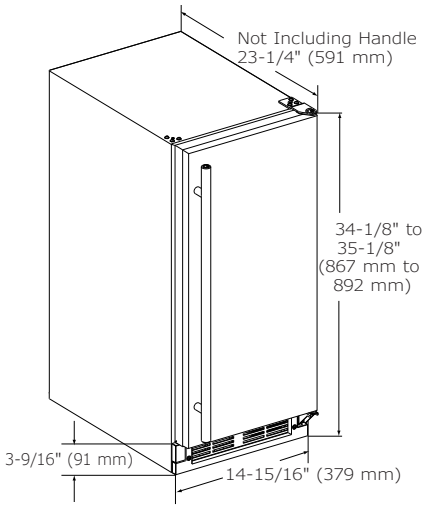

CABINET CUT-OUT

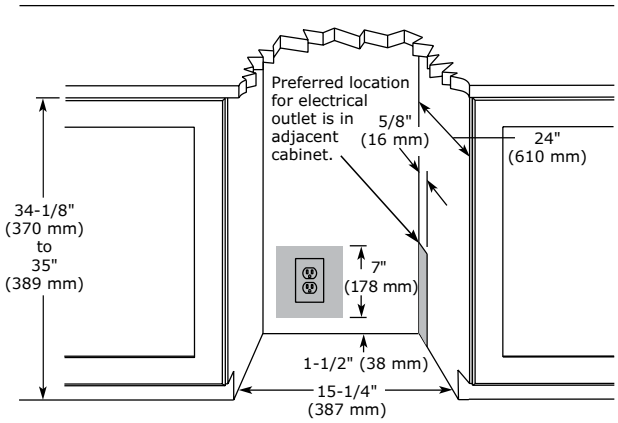

INSTALLATION NOTES

When installing adjacent to wall, ensure 2-1/2” clearance on hinged side for 90° door opening, allowing ample room for door handle.
No additional clearance around sides, top or rear of unit is needed for ventilation.
Do not obstruct front grille air flow.

SPECIFICATIONS

Model	BI1215SOD
Amps: Running	2.5
Control Type	On/Off Switch
Defrost Type	Manual
Dimensions: Depth	23 ¼" / 591 mm
Dimensions: Height	34 ⅛" / 867 mm
Dimensions: Width	14 ¹⁵⁄₁₆" / 379 mm
ENERGY STAR	na
Ice Production Per Day	25 lbs
Ice Storage	25 lbs
Product Weight: Max	83 lbs
Refrigerant Type	R134a
Sabbath (Star K Certified)	No

ELECTRICAL REQUIREMENTS

This unit requires a grounded a polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).

Deemed suitable for outdoor use by UL.

Please visit u-line.com to view this model’s User Guide.
All specifications are subject to change without notice.